

DESIGN OPTIONS

DESIGN A

DESIGN B

COMPONENT SPECIFICATION



Approx. Lead Time 2 - 3 weeks

Component	Material / Option	Max. Temperature
Infill	Glass Fibre	550°C
Inner Skin	Texturised Glass Cloth (Caramalised finish)	600°C
Outer Skin	Woven Glass Fibre (Silicone coated)	550°C
Thread	Kevlar coated Stainless Steel	550°C
Fastener	Velcro	265°C
	Metal Cam Buckle	550°C

THICKNESS / FASTENER OPTIONS

Jacket Thickness

1. 25mm (Standard)	2. 10mm
--------------------	---------

Larger thicknesses available upon request


Main Fastener

1. Metal Cam Buckle	2. Velcro
---------------------	-----------

BESPOKE REQUIREMENTS

Insulation Jackets can be designed to include cut-outs and holes in order to best accommodate the application in question. To ensure the Jacket is designed to your exact specification, please submit the following information:

- Design Option (A or B)
- Jacket Internal Diameter
- Jacket Overall Length
- Jacket Thickness
- Main Fastener
- Any cut out / hole sizes and positioning

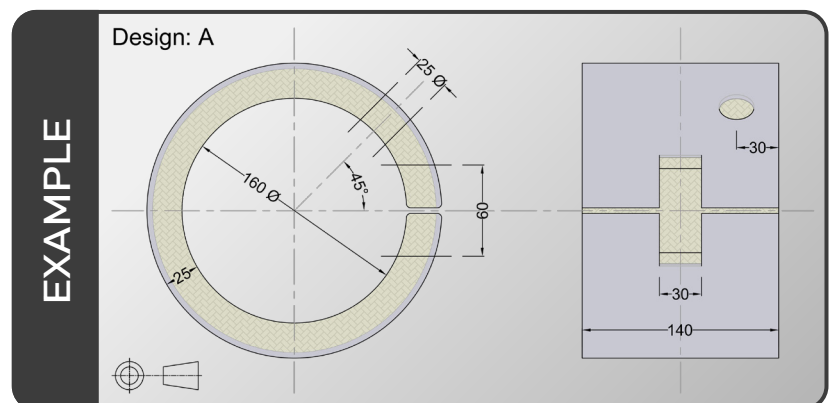

DESIGN OPTIONS

DESIGN A

DESIGN B

COMPONENT SPECIFICATION





Approx. Lead Time

5 - 7 weeks

Component	Material / Option	Max. Temperature
Infill	Glass Fibre	550°C
Inner Skin	Texturised Glass Cloth (Caramalised finish)	600°C
Outer Skin	Woven Glass Fibre (Silicone coated)	550°C
Thread	Kevlar coated Stainless Steel	550°C
Fastener	Velcro	265°C
	Metal Cam Buckle	550°C

THICKNESS / FASTENER OPTIONS

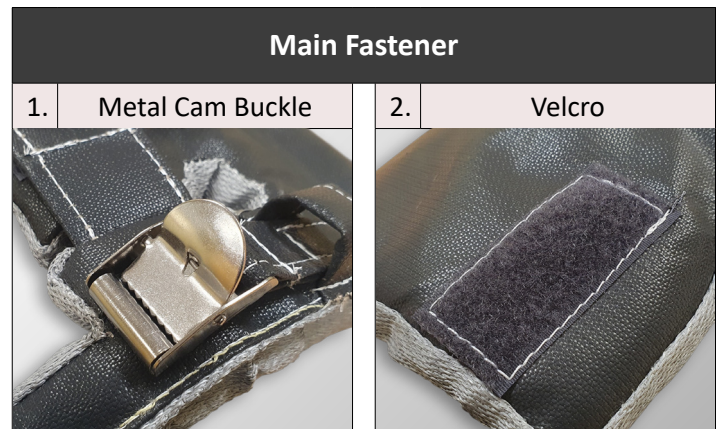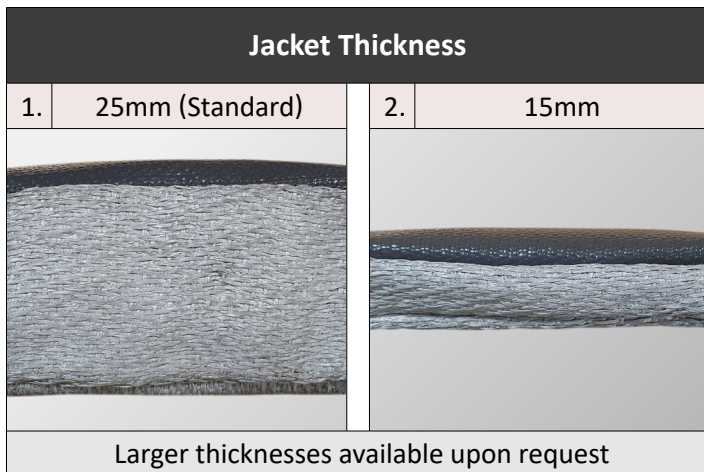

BESPOKE REQUIREMENTS

Insulation Jackets can be designed to include cut-outs and holes in order to best accommodate the application in question. To ensure the Jacket is designed to your exact specification, please submit the following information:

- Design Option (A or B)
- Jacket Internal Diameter
- Jacket Overall Length
- Jacket Thickness
- Main Fastener
- Any cut out / hole sizes and positioning

