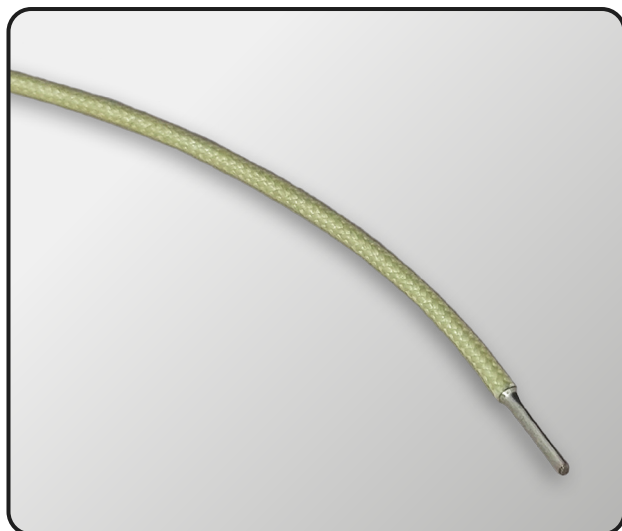


CABLES OPTIONS
POWER

THERMOCOUPLE

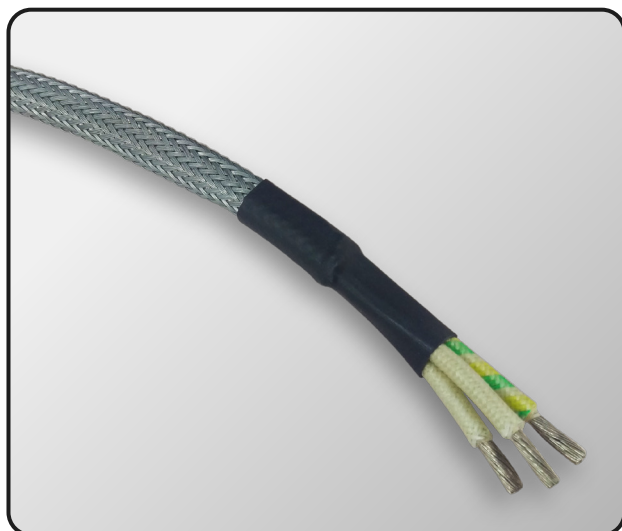
CONTROLLER

SLEEVING


STYLE 1
Glass Fibre - Single Core

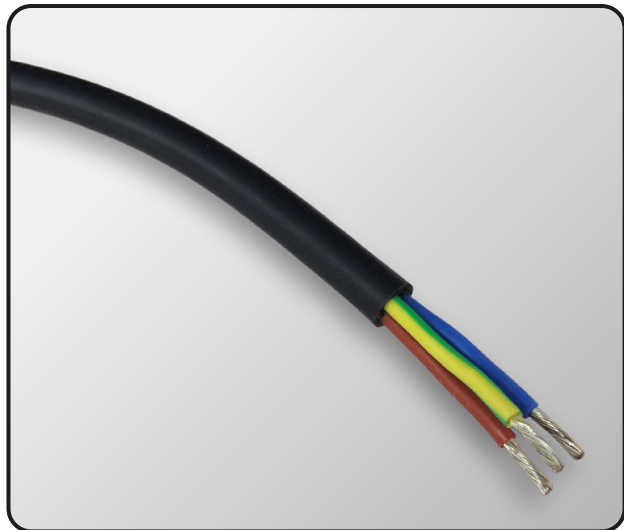
Size	Rating	Product Code
0.7mm ²	5 Amps	CABL00346
1.2mm ²	8 Amps	CABL08528
1.5mm ²	12 Amps	CABL01090
2.5mm ²	20 Amps	CABL01091
4.0mm ²	25 Amps	CABL00268
6.0mm ²	32.5 Amps	CABL31405

Max. Temperature	350°C
Core Material	Pure Nickel
Sheath Material	Glass Fibre


STYLE 2
Armour Braid - Multicore

Cores	Size	Rating	Product Code
2	0.7mm ²	5 Amps	CABL17778
3	0.7mm ²	5 Amps	CABL18950
	1.5mm ²	12 Amps	CABL02188
	2.5mm ²	20 Amps	CABL02011
	4.0mm ²	30 Amps	CABL09873
	6.0mm ²	35 Amps	CABL47747
4	1.5mm ²	12 Amps	CABL18731
	2.5mm ²	20 Amps	CABL17406
	4.0mm ²	30 Amps	CABL10639
5	1.5mm ²	12 Amps	CABL24113

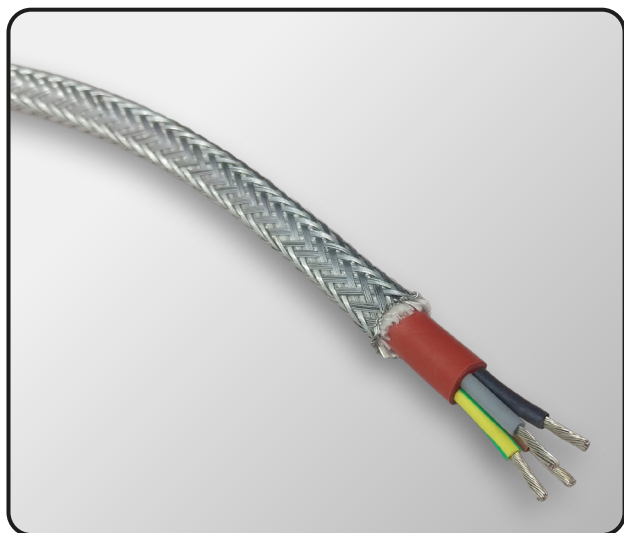
Max. Temperature	350°C
Core Material	Pure Nickel - Glass Fibre
Sheath Material	Stainless Steel

CABLES OPTIONS
POWER
THERMOCOUPLE
CONTROLLER
SLEEVING


Max. Temperature	180°C
Core Material	Tinned Copper - Silicone
Sheath Material	Silicone

STYLE 3
Silicone - Multicore

Cores	Size	Rating	Product Code
2	0.7mm ²	5 Amps	Please Enquire
	1.5mm ²	12 Amps	CABL31893
	2.5mm ²	20 Amps	Please Enquire
3	0.7mm ²	5 Amps	CABL26368
	1.5mm ²	12 Amps	CABL16062
	2.5mm ²	20 Amps	CABL16063
	4.0mm ²	30 Amps	CABL33698
	6.0mm ²	35 Amps	CABL20639
4	1.5mm ²	12 Amps	CABL31406
	2.5mm ²	20 Amps	CABL23770
	4.0mm ²	30 Amps	Please Enquire
	6.0mm ²	35 Amps	CABL46193
5	1.5mm ²	12 Amps	CABL37822
	2.5mm ²	20 Amps	CABL18511
	4.0mm ²	30 Amps	CABL39150
	6.0mm ²	35 Amps	Please Enquire



Max. Temperature	180°C
Core Material	Tinned Copper - Silicone
Sheath Material	Silicone - Galvanised Steel

STYLE 4
Silicone/Armour Braid - Multicore

Cores	Size	Rating	Product Code
2	0.7mm ²	5 Amps	Please Enquire
	1.5mm ²	12 Amps	CABL43811
	2.5mm ²	20 Amps	Please Enquire
3	0.7mm ²	5 Amps	Please Enquire
	1.5mm ²	12 Amps	CABL27693
	2.5mm ²	20 Amps	CABL27694
	4.0mm ²	30 Amps	CABL48342
	6.0mm ²	35 Amps	Please Enquire
4	1.5mm ²	12 Amps	Please Enquire
	2.5mm ²	20 Amps	CABL27695
	4.0mm ²	30 Amps	CABL27696
	6.0mm ²	35 Amps	CABL35797
5	1.5mm ²	12 Amps	CABL33867
	2.5mm ²	20 Amps	CABL33868
	4.0mm ²	30 Amps	Please Enquire
	6.0mm ²	35 Amps	Please Enquire

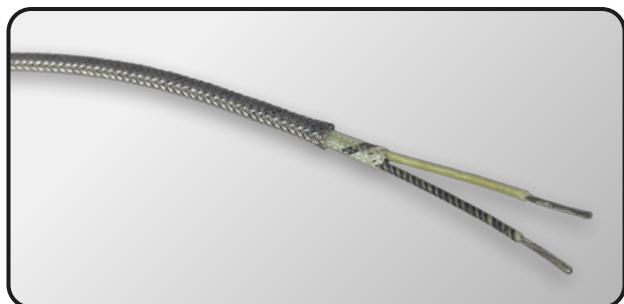
CABLES OPTIONS

POWER

THERMOCOUPLE

CONTROLLER

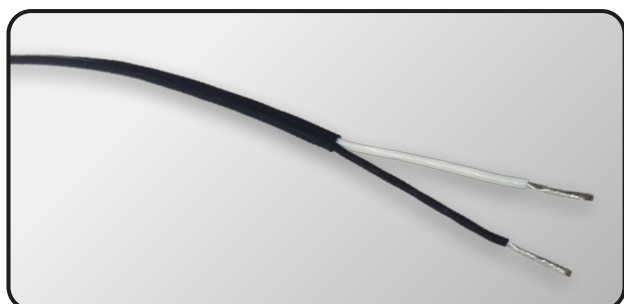
SLEEVING



Max. Temperature	350°C
Core Material	Pure Nickel - Glass Fibre
Sheath Material	Stainless Steel

STYLE 5
Armour Braid

Type	Cores	Product Code
Type 'J'	2	CABL00824
Type 'K'	2	CABL02352
Type 'L'	2	Please Enquire
Type 'N'	2	CABL40779
Type 'T'	2	CABL40778
PT100	2	CABL16810
	3	Please Enquire
	4	Please Enquire



Max. Temperature	250°C
Core Material	Pure Nickel - PTFE
Sheath Material	PTFE

STYLE 6
PTFE

Type	Cores	Product Code
Type 'J'	2	CABL21685
Type 'K'	2	Please Enquire
Type 'L'	2	Please Enquire
Type 'N'	2	Please Enquire
Type 'T'	2	Please Enquire
PT100	2	Please Enquire
	3	CABL16210
	4	Please Enquire



Max. Temperature	100°C
Core Material	Tinned Copper - PVC
Sheath Material	PVC

STYLE 7
PVC

Type	Cores	Product Code
Type 'J'	2	CABL02636
Type 'K'	2	CABL20023
Type 'L'	2	Please Enquire
Type 'N'	2	Please Enquire
Type 'T'	2	Please Enquire
PT100	2	Please Enquire
	3	Please Enquire
	4	Please Enquire

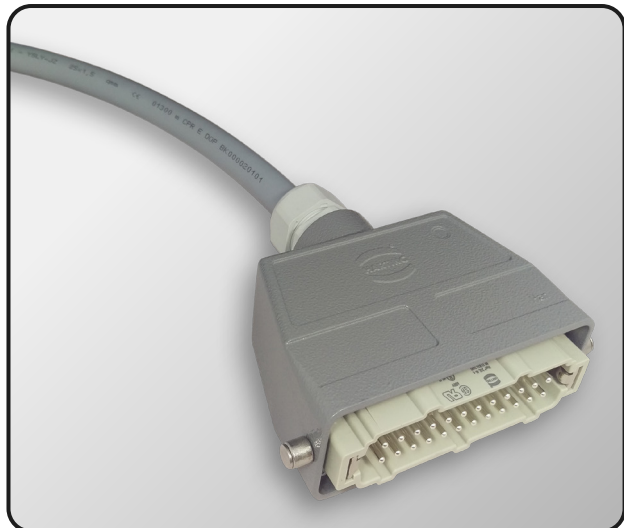
CABLES OPTIONS

POWER

THERMOCOUPLE

CONTROLLER

SLEEVING


STYLE 8
Silicone Multicore

Type	Zones	Connector Pins		
Heater	5	10	24	
	8		24	25
	12		24	25
Thermocouple	5			25
	8		24	25
	12		24	25

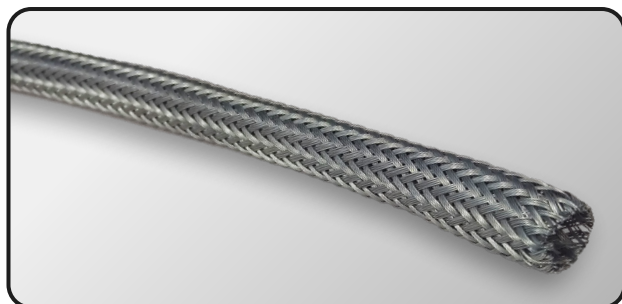
Max. Temperature	75°C
Core Material	Tinned Copper
Sheath Material	Silicone

CABLES OPTIONS

POWER

THERMOCOUPLE

CONTROLLER

SLEEVING

STYLE 9
Armour Braid

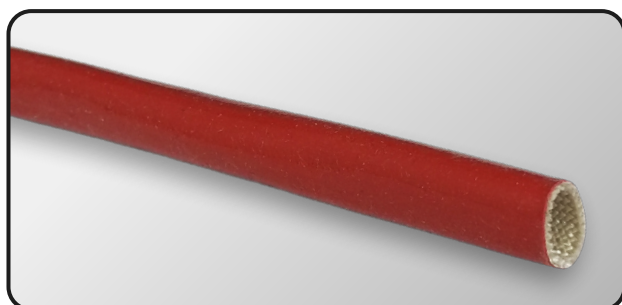
Inner Diameter	Strand Size	Product Code
3·0mm - 6·0mm Ø	0·13mm ²	Please Enquire
7·0mm - 15·0mm Ø	0·13mm ²	CABL15603

Max. Temperature	400°C
Sheath Material	Galvanised Steel


STYLE 10
Armour Conduit

Inner Diameter	Outer Diameter	Product Code
5·0mm Ø	7·0mm Ø	Please Enquire
6·0mm Ø	8·0mm Ø	Please Enquire
8·0mm Ø	10·0mm Ø	CABL03970
10·0mm Ø	13·0mm Ø	CABL14990
11·0mm Ø	14·0mm Ø	CABL25212
13·0mm Ø	16·0mm Ø	Please Enquire

Max. Temperature	400°C
Sheath Material	Galvanised Steel


STYLE 11
Glass Fibre

Inner Diameter	Sleeve Colour			Product Code
2·5mm Ø		Brick Red	White	CABL13397
3·0mm Ø	Black		White	CABL14073
3·5mm Ø	Black		White	CABL15644
8·0mm Ø			White	CABL09033
10·0mm Ø		Brick Red	White	CABL08278
12·0mm Ø	Black		White	CABL30293

Max. Temperature	200°C
Sheath Material	Glass Fibre - Silicone